


TH5819C



外形尺寸

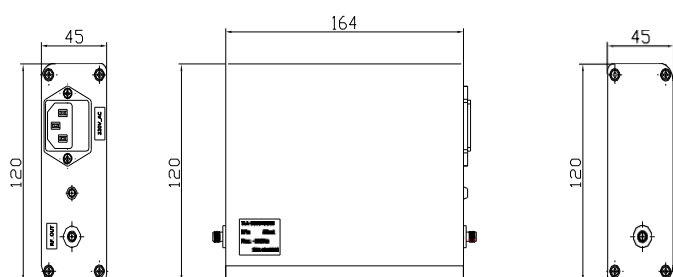

■ 频率范围	26 - 40GHz
■ 增益	50dB min
■ P1dB	10dBm typ
■ 噪声系数	3.5dB typ

技术指标@25℃

频率范围	26-40GHz
增益	50dB min
增益平坦度	±4dB typ
P1dB	10dBm typ
输入反射	-10dB
输出反射	-10dB
噪声系数	3.5dB typ
供电AC电源	110-240 V
射频连接器	2.92mm/K
工作温度	-20℃ ~ 70℃
储存温度	-55℃ ~ 100℃
最大入口功率	-35dBm

订单描述

TH5819C



指标特性

测试曲线 (Temp @+25℃)

