






TLA-009013G37



外形尺寸

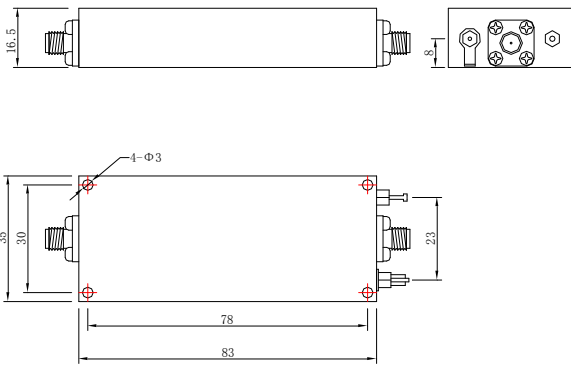

测试曲线 (Temp @+25°C)

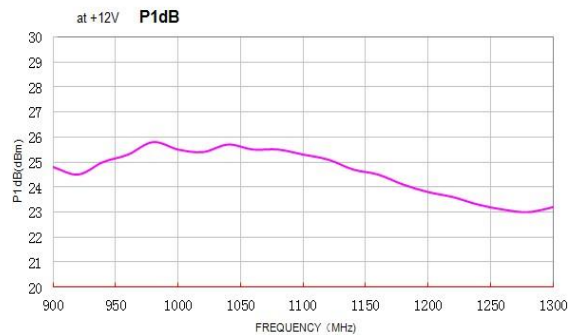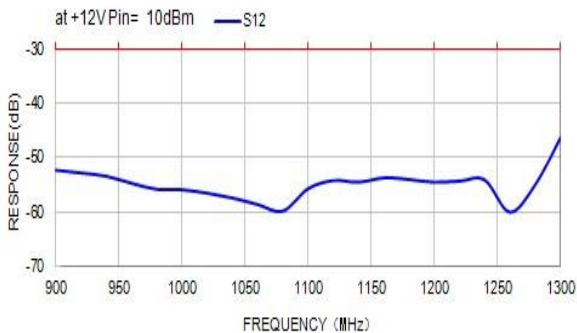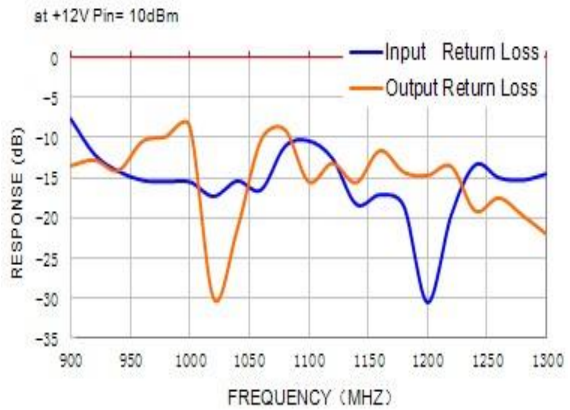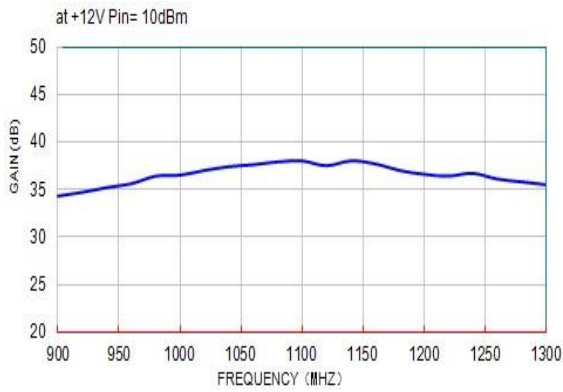

■ 频率范围	900 - 1300MHz
■ 增益	37dB typ
■ P1dB	20.0dBm typ
■ 噪声系数	1.3dB@1.0GHz typ

技术指标@25°C

频率范围	900-1300MHz
噪声系数	1.3 dB@1.0GHz typ
增益	37dB typ
增益平坦度	±1.5 dB typ
P1dB	20.0 dBm typ
OIP3	32dBm
输入驻波	2.0 :1
输出驻波	2.5 :1
电压	12.0V
电流	300mA
操作温度	-20°C ~70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	+20dBm

订单描述

TLA- 009013G37  指标特性

