


TLA-060079G42



外形尺寸

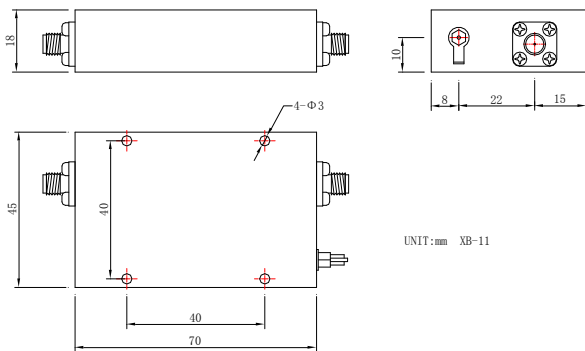

■ 频率范围	6 - 7.9GHz
■ 增益	42dB typ
■ P1dB	20dBm typ
■ 噪声系数	2.0dB typ

技术指标@25°C

频率范围	6-7.9GHz
增益	42dB typ
增益平坦度	±2dB typ
P1dB	20dBm typ
OIP3	30dBm typ
噪声系数	2.0dB typ
反向隔离 (最大值)	50dB
输入驻波	2.0 :1
电压	12.0V
电流	250mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-5dBm

订单描述

TLA-060079G42

指标特性

测试曲线 (Temp @+25°C)

